



AURA™

PERFORMANCE HEATERS

SHADOW SERIES

ARCHITECTURALLY FOCUSED
NO-LIGHT RADIANT HEATER



Redefine your room or studio with our no-light electric infrared heater. Featuring a sleek yet robust aluminum extruded body and long wave radiant technology, this heater is designed to take the edge off in enclosed rooms or outdoors in moderate climates. A great choice for your solarium, workshop, yoga studio or semi-enclosed outdoor room, available in 3 sizes up to 3200W.

KEY FEATURES

- No-Light radiant electric heater
- Sleek design for architecturally focused environments
- Solid extruded aluminum construction
- Best for protected areas



DS15120B
1500W | 120V



DS24240
2400W | 240V




DS32240 | DS32208
3200W | 240V OR 208V



SHADOW SERIES MODELS

| MODEL | | WATTS | VOLTS | AMPS | BTUS | DIMENSIONS | |
|---------|-------|-------|-------|------|--------|--------------|------------|
| | | | | | | LENGTH | WIDTH |
| DS32240 | BLACK | 3200 | 240 | 13.3 | 10,920 | 66" (1676mm) | 8" (203mm) |
| DS32208 | BLACK | 3200 | 208 | 15.4 | 10,920 | 66" (1676mm) | 8" (203mm) |
| DS24240 | BLACK | 2400 | 240 | 10 | 8,200 | 50" (1270mm) | 8" (203mm) |
| DS15120 | BLACK | 1500 | 120 | 12.5 | 5,115 | 32" (813mm) | 8" (203mm) |

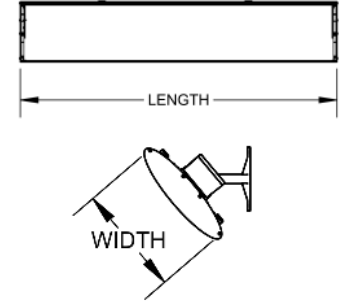


Do not de-rate Shadow series heaters. De-rating will result in significantly reduced heating output.

HEATING COVERAGE PATTERNS

| MODEL | WIDTH | DEPTH | HEIGHT |
|--------------------|-----------|-----------|-----------|
| DS32240 DS32208 | 9' (2.7m) | 7' (2.1m) | 8' (2.4m) |
| DS24240 | 8' (2.4m) | 6' (1.8m) | 8' (2.4m) |
| DS15120 | 7' (2.1m) | 6' (1.8m) | 8' (2.4m) |


This heater is intended for moderate climates. Heater coverage areas will be reduced in highly exposed areas. Contact dealer for specifying support.

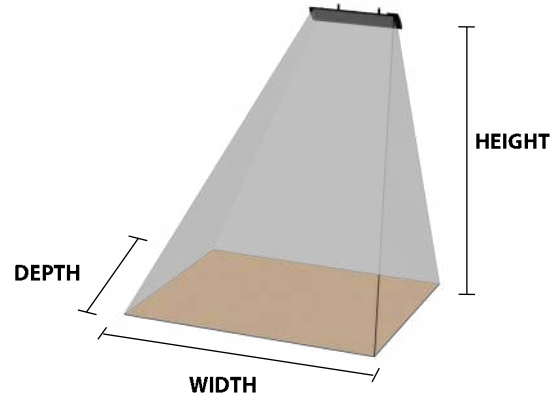


CLEARANCES AND MOUNTING OPTIONS

| MODEL | FLOOR (USA) | FLOOR (CANADA) | CEILING (WALL MOUNT) | CEILING (CEILING MOUNT) | END | SIDE | MOUNTING OPTION |
|--------------------|-------------|----------------|----------------------|-------------------------|-------------|-------------|-----------------|
| DS32240 DS32208 | 6'7" (2.0m) | 8' (2.4m) | 8" (203mm) | 4" (102mm) | 18" (457mm) | 18" (457mm) | WALL OR CEILING |
| DS24240 | 6'7" (2.0m) | 8' (2.4m) | 8" (203mm) | 4" (102mm) | 18" (457mm) | 18" (457mm) | WALL OR CEILING |
| DS15120 | 6'7" (2.0m) | 8' (2.4m) | 8" (203mm) | 4" (102mm) | 18" (457mm) | 18" (457mm) | WALL OR CEILING |

WALL MOUNTED CLEARANCES

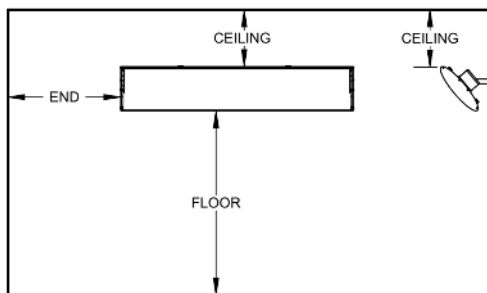

CEILING SUSPENDED CLEARANCES

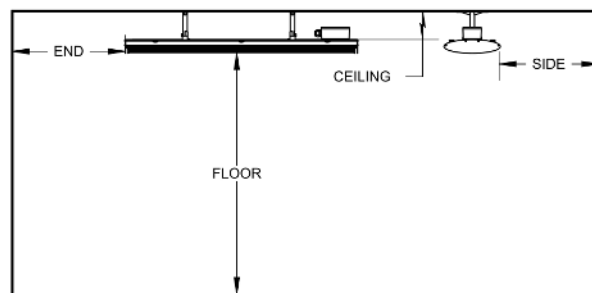

INCLUDED PARTS



ROTATIONAL MOUNTING BRACKETS

OPTIONAL ACCESSORIES



CEILING SUSPENSION POLES

12", 24" and 48" (DS12EXTB, DS24EXTB, DS48EXTB)